





THE SYMBOL SHALL CONSIST OF A WHITE FIGURE ON A BLUE BACKGROUND. THE BLUE COLOR SHALL BE FEDERAL BLUE, COLOR #15090, STANDARD 555B.

EXCEPTION:
THE APPROPRIATE ENFORCEMENT AGENCY MAY APPROVE OTHER COLORS TO COMPLEMENT DECOR OR UNIQUE DESIGN. THE SYMBOL CONTRAST SHALL BE LIGHT ON DARK OR DARK ON LIGHT.

FIGURE 11B-703.7.2.1.
INTERNATIONAL SYMBOL OF ACCESSIBILITY


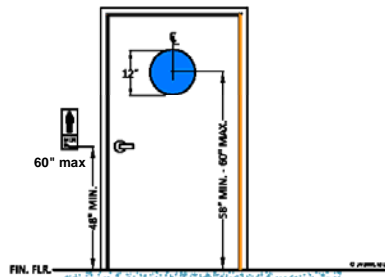


PICTOGRAM FIELD
11B-703.6.1



11B-502.6
PARKING SPACE IDENTIFICATION

INTERNATIONAL SYMBOL OF ACCESSIBILITY

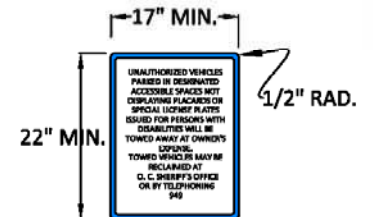













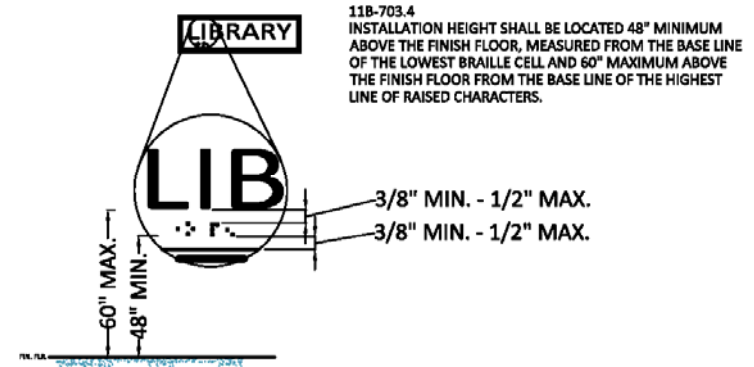
REFLECTORIZED SIGN CONSTRUCTED OF PORCELAIN STEEL WITH BEADED TEXT OR EQUAL
11B-502.8.
UNAUTHORIZED VEHICLE SIGN



TABLE 11B-407.4.7.1.3

ELEVATOR CONTROL BUTTON IDENTIFICATION


CONTROL BUTTON	TACTILE	BRAILLE
EMERGENCY STOP		
ALARM		
DOOR OPEN		
DOOR CLOSE		
MAIN ENTRY FLOOR		
PHONE		



**POSITION OF BRAILLE CHARACTERS
11B-703.3.2**

11B-703.2.3 STYLE.
CHARACTERS SHALL BE SANS SERIF. CHARACTERS SHALL NOT BE ITALIC, OBLIQUE, SCRIPT, HIGHLY DECORATIVE, OR OF OTHER UNUSUAL FORMS.

11B-703.2.4
CHARACTER PROPORTIONS. CHARACTERS SHALL BE SELECTED FROM FONTS WHERE THE WIDTH OF THE UPPERCASE LETTER "O" IS 60 PERCENT MINIMUM AND 110 PERCENT MAXIMUM OF THE HEIGHT OF THE UPPERCASE LETTER "I".

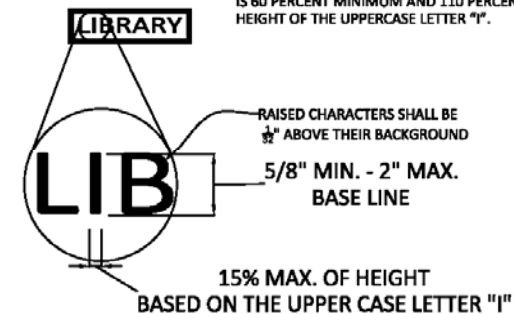

**RAISED CHARACTERS
11B-703.2**

